

Model 1202B

Rotary Torque/RPM/HP Measurement System

DESCRIPTION

Model 1202B is a wireless telemetry system capable of monitoring the parameters of torque, RPM, and horsepower utilizing a 1226A collar assembly, 2120B transmitter, stationary loop antenna, 1211D power separation unit, and 1642A receiver unit.

FEATURES

- dc to 1000 Hz frequency response
- Three analog outputs and optional isolated output channel
- 10 kHz sampling rate
- 175 microstrain (0.5 mV/V) transmitter sensitivity
- Wall-mounted, NEMA 4 enclosure

Model 1202B

PERFORMANCE SPECIFICATIONS

Characteristic	Measure
Frequency response	dc to 1000 Hz
Sensitivity (transmitter)	175 microstrain (0.5 mV/V)
Number of channels	1 to 3
Sampling rate	10 kHz
Receiver readout display type	3.5 digit 7 segment LED

ENVIRONMENTAL SPECIFICATIONS

Characteristic	Measure
Temperature, operating (transmitter)	-55 °C to 125 °C [-67 °F to 257 °F]
Temperature, operating (receiver/IPS/PSU)	10 °C to 50 °C [50 °F to 122 °F]
Temperature, compensated (transmitter)	0 °C to 75 °C [32 °F to 167 °F]
Temperature, compensated (receiver)	10 °C to 50 °C [50 °F to 122 °F]
Static G force (rotating components)	15000 G
RPM limits (rotating components)	See graph - depends on shaft diameter
Vibration (rotating components)	100 G to 1 kHz
Collar weight	Varies with shaft diameter
Electronics weight (not including cables)	Receiver and PSU 15 kg [33 lb]

ELECTRICAL SPECIFICATIONS

Characteristic	Measure
Induction power source	160 kHz \pm 6 %
Cable length (PSU to receiver)	4,6 m [15 ft] standard ¹
Max. cable length (PSU to receiver)	152,4 m [500 ft]
Power supply voltage (receiver)	115/230 Vac user-selectable
Power consumption (receiver)	100 VA max.
RF operating frequency	10.7 MHz ²
RF modulation type	FSK
Max. analog output (receiver)	\pm 10 Vdc @ 1 mA max.
Output impedance (receiver)	< 1 Ohm
Electrical termination (receiver output)	Screw terminal
Electrical termination (transmitter)	9 pins, 0,64 mm [0.025 in] diameter

1. 4,6 m [15 ft] is the standard cable length, other lengths are available. Consult factory.
2. Consult factory for other frequencies.

Rotary Torque/RPM/HP Measurement System

OPTION CODES

Range Code	Many range/option combinations are available in our quick-ship and fast-track manufacture programs. Please see http://sensing.honeywell.com/TMsensor-ship for updated listings.
Compensated transmitter temperature	62s. 100 °C [212 °F]
Receiver	62a. Horsepower-hour totalizer 62b. Revolutions totalizer
Display (receiver)	62c. Remote display
Filter (receiver)	62d. EMI filter for analog outputs
Vibration and shock (PSU)	62g. Heavy duty shield and receiver
RF operating frequency	10.7 MHz ¹
Analog output (receiver)	±10 Vdc @ 1 mA 62e. 1 channel 4 mA to 20 mA isolated output 62f. 2 channel 4 mA to 20 mA isolated output

1. 4,6 m [15 ft] is the standard cable length, other lengths are available. Consult factory.


MECHANICAL SPECIFICATIONS

Characteristic	Measure
Dimensions (collar cross section)	31,8 mm x 31,8 mm [1.25 in x 1.25 in] typical (152,4 mm [6 in] OD min.)
Dimensions (receiver) (L x W x H)	406,4 mm x 508 mm x 254 mm [16 in x 20 in x 10 in]
Dimensions (IPS) (L x W x H)	152,4 mm x 101,6 mm x 50,8 mm [6 in x 4 in x 2 in]
Shaft diameter limits (collar)	50,8 mm to 1066,8 mm [2 in to 42 in] ³
Collar material	Type G-11 glass epoxy


3. 50,8 mm to 203,2 mm [2 in to 8 in] is standard shaft diameter, consult factory for other shaft diameters.

RPM LIMITS GRAPH

OPERATING RPM LIMIT VS. SHAFT DIAMETER

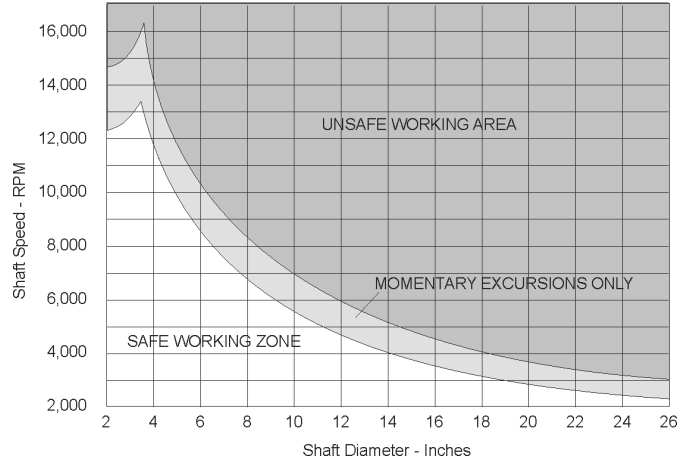

TYPICAL SYSTEM DIAGRAM

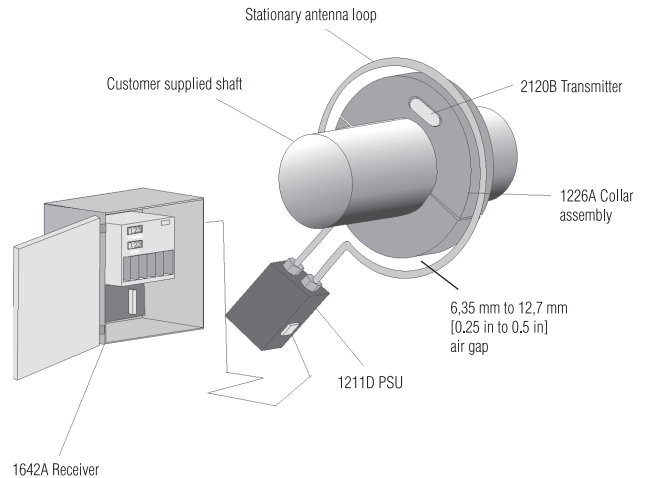

Model 1202B

Rotary Torque/RPM/HP Measurement System

Warranty. Honeywell warrants goods of its manufacture as being free of defective materials and faulty workmanship. Honeywell's standard product warranty applies unless agreed to otherwise by Honeywell in writing; please refer to your order acknowledgement or consult your local sales office for specific warranty details. If warranted goods are returned to Honeywell during the period of coverage, Honeywell will repair or replace, at its option, without charge those items it finds defective. **The foregoing is buyer's sole remedy and is in lieu of all warranties, expressed or implied, including those of merchantability and fitness for a particular purpose. In no event shall Honeywell be liable for consequential, special, or indirect damages.**

While we provide application assistance personally, through our literature and the Honeywell web site, it is up to the customer to determine the suitability of the product in the application.

Specifications may change without notice. The information we supply is believed to be accurate and reliable as of this printing. However, we assume no responsibility for its use.

For more information about Sensing and Control products, visit www.honeywell.com/sensing or call +1-815-235-6847

Email inquiries to info.sc@honeywell.com

⚠ WARNING
PERSONAL INJURY

- DO NOT USE these products as safety or emergency stop devices or in any other application where failure of the product could result in personal injury.

Failure to comply with these instructions could result in death or serious injury.

⚠ WARNING
MISUSE OF DOCUMENTATION

- The information presented in this catalogue is for reference only. DO NOT USE this document as product installation information.
- Complete installation, operation and maintenance information is provided in the instructions supplied with each product.

Failure to comply with these instructions could result in death or serious injury.

Sensing and Control
Automation and Control Solutions
Honeywell
1985 Douglas Drive North
Golden Valley, MN 55422 USA
+1-815-235-6847
www.honeywell.com/sensing

008789-1-EN IL50 GLO
June 2008
Copyright © 2008 Honeywell International Inc. All rights reserved.

Honeywell