


SPECIFICATIONS P/N 2329

Available Ranges: 4000, 5000 LBS.  
 Non-linearity/Hysteresis:  $\pm 0.2\%$  F.S.  
 Non-repeatability:  $\pm 0.5\%$  F.S.  
 Output: 2mV/V  
 Resolution: Infinite  
 Operating Temperature: -65 to +250 deg F  
 Compensated Temperature: 60 to 160 deg F  
 Temperature Effect on Zero/Span: .005% F.S./deg F  
 Strain Gage Type: Bonded Foil  
 Excitation Voltage: 10.0 VDC  
 Bridge Resistance: 350 ohm  
 Safe Overload: 50% over capacity  
 Deflection- Full Scale: .001"-.003"  
 Casing Material: 17-4 PH Stainless

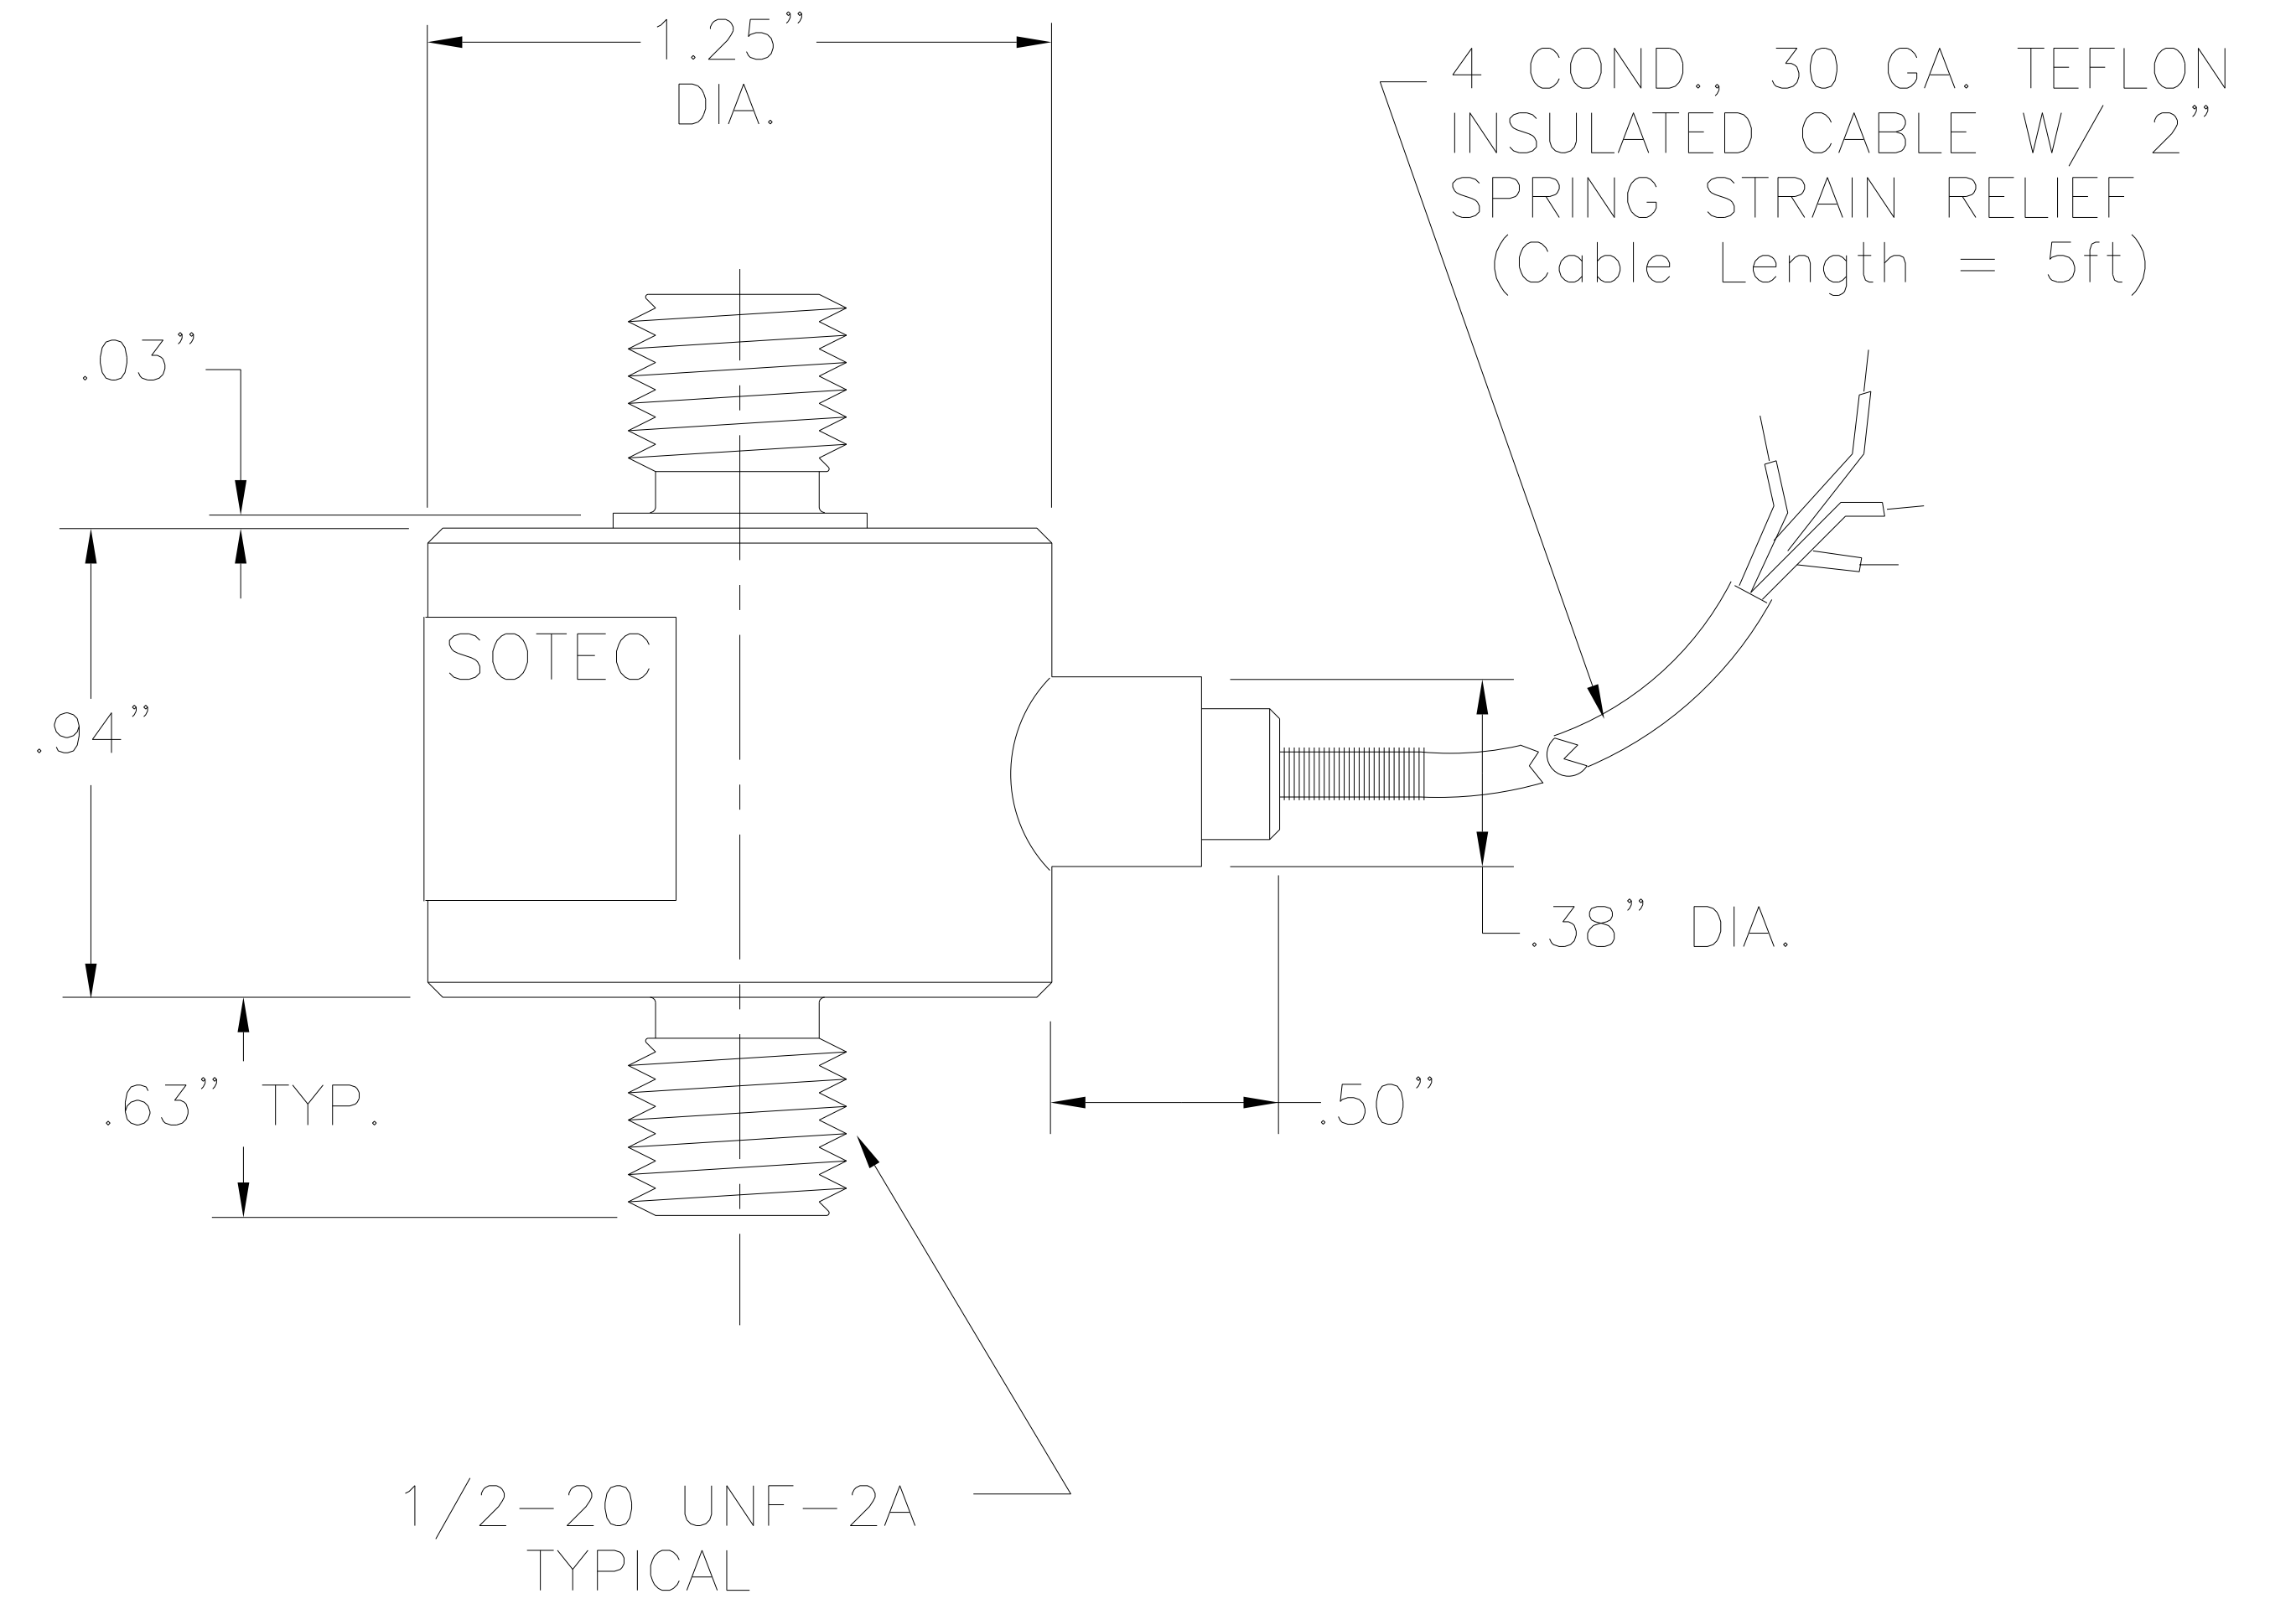

WIRING CODE

RED +EXCITATION  
 BLACK -EXCITATION  
 GREEN -OUTPUT  
 WHITE +OUTPUT

GT CODE	REV	DESCRIPTION	REVISED BY	RELEASE DATE
GT SIZE CODE	SCALE: ~~~	DRAWN 9/18/91	CHECKED: MAB	APPROVED:
USED ON	<b>SENSOTEC INC.</b> 1200 CHESAPEAKE AVE. COLUMBUS, OHIO 43212			
MATERIAL SPEC.	.X	MODEL 31 LOAD CELL P/N 2329 4K-5K LBS., 1/2-20 UNF-2A		
	.XX $\pm .01$ "	DOCUMENT NUMBER 000-2396-00		
	.XXX $\pm .005$ "			
	$\pm 1/2$ "	SHEET 1 OF 1		