


MICRO SWITCH BASIC SWITCH SUBMINIATURE COMPARISON

The package size of the MICRO SWITCH subminiature switch is ideal for a wide variety of applications where space on the equipment is at a premium.

SERIES	SM	SX	ZD	ZM	ZM1	ZW	ZX	HD	HD1
Type, Market	premium	premium	standard, sealed	standard, unsealed	standard, unsealed	standard, sealed	standard, unsealed	standard, sealed	standard, sealed
Sealing	sealed on 411SM	-	IP67 (prewired)	-	-	IP67 (prewired)	-	IP67 (prewired)	IP67 (prewired)
Amp rating (A)	0.1 to 11	1 to 7	0.1, 3	0.1, 5, 10.1	0.1, 3, 6, 10.1, 16	0.1, 6	0.1, 3	0.1 to 3	0.1
Voltage	115 Vac, 125 Vac, 250 Vac, 30 Vdc	125 Vac, 250 Vac, 28 Vdc	125 Vac, 12 Vdc	125 Vac, 250 Vac, 30 Vdc	125 Vac, 250 Vac	125 Vac, 250 Vac	125 Vac, 48 Vdc	125 Vac, 12 Vdc	12 Vdc
Circuitry	SPDT	SPDT, SPNO	SPDT	SPST, SPDT, SPNO	SPDT, SPNO, SPNC	SPDT, SPNO, SPNC	SPDT	SPDT, SPNO, SPNC	SPNO, SPNC
Operating force (gf)	0.04 oz to 2 oz	0.71 oz to 6 oz	130 to 195	0.18 oz to 8.78 oz	12 to 355	1.94 oz to 7.16 oz	0.53 oz to 5.3 oz	130 max.	100 to 200
Terminations	quick connect, solder, pcb	quick connect, solder, pcb	solder, pcb, pre-wired	quick connect, solder, pcb	quick connect, solder, pcb	quick connect, solder, cable	solder, pcb	solder, pcb, pre-wired	solder, pcb, pre-wired, clips
Actuators/ levers	pin plunger, straight, roller, sim. roller, paddle	pin plunger, straight, roller, sim. roller, offset flag, crossed roller	pin plunger, straight, sim. roller	pin plunger, straight, roller, sim. roller, L-shaped	pin plunger, straight, roller, sim. roller, L-shaped	pin plunger, straight, roller, sim. roller	pin plunger, straight, sim. roller, special	pin plunger, lever, sim. roller, formed lever	pin plunger
Approvals	UL, CSA, ENEC, CE	UL, CSA, ENEC, CE	UL, cUL, CE, ENEC	UL, CSA, CE	UL, cUL, ENEC	UL, cUL, CE, ENEC	UL, CSA	UL, cUL, ENEC, CQC	UL, cUL, ENEC, CQC
Operating Temp. (°C)	-55 to 121/204	-55 to 121/204	-40 to 85	-40 to 120	-40 to 125	-25°C to 70°C/120°C	-40 to 65	-40 to 125	-40 to 85
Contacts	silver, gold	silver, gold	silver, gold-plated silver	silver, gold-plated silver, silver-tin-indium oxide	silver, gold-plated silver & brass, silver-tin-indium oxide	silver, gold-plated silver	silver, gold-plated silver	silver alloy	silver-plated copper alloy
Housing material	phenolic	phenolic	PBT polyester	polyamide (nylon)	polyamide (nylon)	PBT polyester	polyamide (nylon)	polyamide (nylon)	PBT Polyester
Dimensions mm H x W x L	12,7 x 6,35 x 20,3	12,7 x 6,35 x 20,3	10,6 x 6,35 x 19,8	10,6 x 6,4 x 19,8	10,6 x 6,4 x 19,8	9,0 x 6,4 x 19,8	6,5 x 5,7 x 12,7	7,4 x 5,4 x 14,7	7,05 x 5,3 x 8,3

PRODUCT SERIES AND DATASHEETS

Click the product or series to view the Series datasheet.

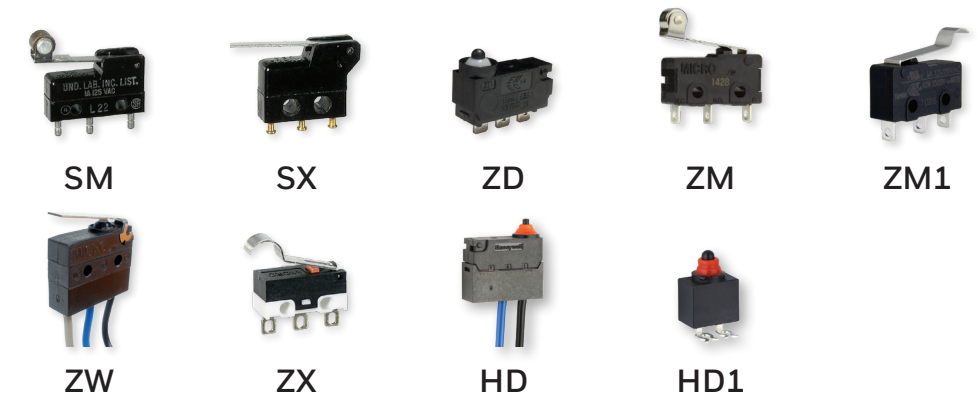

APPLICATIONS



Presence Detection

Ensures door latching and safe operation



Flow Switch

Enables safe and efficient water usage



Power Switch

Reliable system control for motors, pumps, fans



Operator Controls

Interface control for system auxiliary functions



Pressure Switch

Detection and warning of high pressure or over pressure events

SUPPORTING DOCUMENTATION

Click the document title or icon to view the material.

- Applying Precision Switches
- Sensors and Switches for Medical Applications
- Industrial Applications Brochure
- Watertight Switches in Transportation

Honeywell Sensing and Internet of Things

830 East Arapaho Road
Richardson, TX 75081
800-582-4263
www.honeywell.com

004995-1-EN | 1 | 07/20
© 2020 Honeywell International Inc. All rights reserved.

Find out more

Honeywell Sensing and Internet of Things services its customers through a worldwide network of sales offices and distributors. For application assistance, current specifications, pricing, or the nearest Authorized Distributor, visit sensing.honeywell.com or call: International +815 618 3231; USA/Canada +302 613 4491