


Automated Storage and Retrieval System

LIMIT
AP 00045

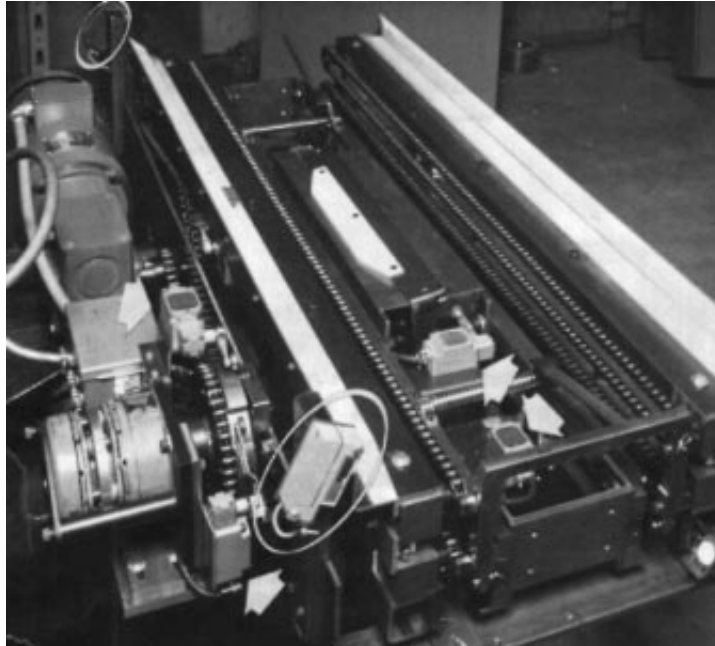

PRODUCT

LS limit switches, GP5 photoelectric controls, 20 FR reed proximity switch, MP photoelectric controls

APPLICATION DESCRIPTION

LS limit switches and GP5 photoelectric controls are used on the bin extractor. The limit switches serve as extractor sequence controls. DC powered GP5 controls guard against protruding loads.

20FR switches slow the load shuttle, then stop it completely. 20FR's also position machine in aisle. MP's prevent pallet load misalignment.