

## Model SC1000/SC2000

### Transducer Display and Signal Conditioning Unit



#### DESCRIPTION

The SC series models are self-calibrating microprocessor-based transducer signal conditioners when used with sig mod equipped transducers. Indicators are available with several different types of input channels and output channels. When used with unamplified strain gage transducers that have the signature calibration module installed, these instruments will completely self calibrate zero, span, decimal point, and engineering units automatically.

Input channels are available for a variety of transducers. Each input channel includes an excitation power supply and either an isolated voltage or isolated current analog output.

- Unamplified pressure or load
- Pressure or load with internal voltage amplifiers
- Pressure or load with internal or external two-wire current amplifiers
- ac/ac displacement transducer
- dc/dc displacement transducer
- RTD temperature probes (Pt100)

#### FEATURES

- One to four channels
- $\pm 6$  digit display
- "Sig cal" auto setup
- Up to 800 Hz frequency response, field selectable
- Pressure, load, displacement transducer, voltage, current, strain gage based sensor input
- Alarm outputs
- CE approved

Available output channels for the SC2000 include:

- Contact relays for the four standard limits or additional limits (max. 16 limits/chassis)
- Isolated digital-to-analog voltage ( $\pm 5$  Vdc or 0 Vdc to 10 Vdc) or current (4 mA to 20 mA)

In addition to the physical input and output channels, up to seven virtual channels can be configured to assist in many potential applications.

#### Four channel chassis

The models SC1000 and SC2000 can hold up to four physical channels in their 3/8 DIN Aluminum bench-top chassis. A bright, dual-line 16-character display can display 5, 6 or 7 numeric digits; simply press a button to select the next channel to be viewed. If configured for split-screen operation, up to four channel values can be displayed at the same time. The SC2000 includes four open collector limit (alarm) outputs plus peak and valley detection.

# Model SC1000/SC2000

## GENERAL SPECIFICATIONS

Characteristic	Measure
Model	SC1000/SC2000
Number of physical channels	1 to 4
Number of virtual channels	1 to 7
Case material	Aluminum
Form factor	3/8 DIN
Mounting	Bench (standard)
Size (W x H x D)	142,24 mm x 71,12 mm x 222,25 mm [5.6 in x 2.8 in x 8.75 in]
Weight	1,81 kg [4 lb]

## DISPLAY SPECIFICATIONS

Characteristic	Measure
Number of displays	1
Number of lines/display	2
Number of characters/line	16
Scaling	Automatic or manual setup
Max. display count	9999999
Decimal point selection	0 to 5
Display type	Vacuum/Fluorescent

## ENVIRONMENTAL SPECIFICATIONS

Characteristic	Measure
Temperature, storage	-29 °C to 93 °C [-20 °F to 200 °F]
Temperature, operating	4 °C to 41 °C [40 °F to 105 °F]

## SPECIAL FEATURES (SC2000 ONLY) SPECIFICATIONS

Characteristic	Measure
Limits setup	Front panel
Limits output, standard	Open-collector
Limits output, relay output channel	Contact relays
Limits quantity	4 std., 16 max. (contact relays)
Peak/valley hold on input channels	Yes
Digital, isolated control inputs	4
Approvals	CE approved (except vehicle powered unit)
Interfaces	Signature calibration

## COMMUNICATIONS SPECIFICATIONS

Characteristic	Measure
Serial setup and output	RS-232/RS-485
Isolation	500 V
Max. baud rate	38400

## POWER SPECIFICATIONS

Characteristic	Measure
Standard ac powered	100 Vac to 230 Vac, 47 Hz to 63 Hz
Excitation drive	120 mA max.

Not RoHS compliant

## INPUT AMPLIFIER CARDS

All input cards include non-isolated, open collector control inputs that can be field configured for any one of the following functions: 1) track hold, 2) peak/valley hold, 3) tare on, and 4) tare off.

Input	Strain gage millivolts	High level volts/mA	RTD millivolts	ac/ac displacement transducer
<b>Transducer type</b>	Unamplified sensors	Amplified pressure or load, dc/dc displacement transducer	Platinum 100 ohm, alpha = 0.00385	ac/ac displacement transducer
<b>Ranges*</b>	0.5 mV/V to 11 mV/V @ 5 V 0.5 mV/V to 5.5 mV/V @ 10 V	±5 Vdc or ±10 Vdc, 4 mA to 20 mA	-200 °C to 800 °C [-328 °F to 1472 °F]	0.1 VRMS to 15 VRMS
<b>Frequency response</b>	See table below	See table below	See table below	See table below
<b>Resolution</b>	See table below	See table below	See table below	See table below
<b>Calibration type</b>	Shunt; mV/V; 2-, 3-, or 5-point known load	Shunt; 2-, 3-, or 5-point known load	2-, 3-, or 5-point known load	2-, 3-, or 5-point known load
<b>Transducer excitation</b>	5 Vdc or 10 Vdc with sense	±15 Vdc, 28 Vdc, or 12 Vdc	10 Vdc	3 Vac @ 3 kHz
<b>Push button 100 % tare</b>	Yes	Yes	N/A	Yes
<b>Push button shunt test</b>	Yes	Yes	N/A	Yes

\* Ranges are field programmable, except for RTD input

# Transducer Display and Signal Conditioning Unit

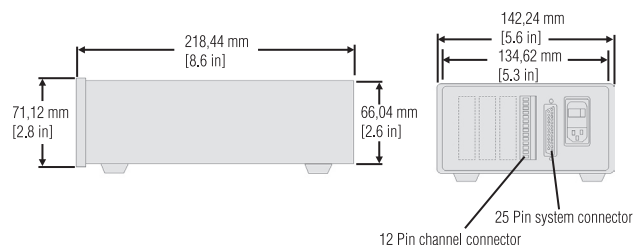
## OUTPUT

Output	Strain gage millivolts	High level volts/mA	RTD millivolts	ac/ac displacement transducer
<b>Voltage range (field selectable)</b>	5 Vdc, ±5 Vdc, 10 Vdc, ±10 Vdc	5 Vdc, ±5 Vdc, 10 Vdc, ±10 Vdc	5 Vdc, ±5 Vdc, 10 Vdc, ±10 Vdc	5 Vdc, ±5 Vdc, 10 Vdc, ±10 Vdc
<b>Current range</b>	4 mA to 20 mA	4 mA to 20 mA	4 mA to 20 mA	4 mA to 20 mA
<b>Source</b>	Any channel	Any channel	Any channel	Any channel
<b>Isolation</b>	500 V	500 V	500 V	500 V
<b>Resolution</b>	13 bits	13 bits	13 bits	13 bits
<b>Frequency response</b>	Same as input	Same as input	Same as input	Same as input

### Resolution (counts) (not including min. 10 % overrange/underrange capability)


Fre- quency response (Hz) field selectable	Step response (ms) typical	Strain gage/RTD	High level	ac/ac displacement transducer
2 (fast mode)	40	±50000	±50000	±25000
2	440	±50000	±50000	±25000
8	110	±25000	±25000	±15000
16	55	±20000	±25000	±10000
32	28	±10000	±20000	±10000
50	16	±5000	±15000	±5000
100	8	±5000	±10000	±5000
250	3	±2000	±10000	±2000
500	2	±2000	±4000	±2000
800	2	±2000	±2500	±2000

## MOUNTING DIMENSIONS AND CHARACTERISTICS




For reference only

## TYPICAL SYSTEM DIAGRAM








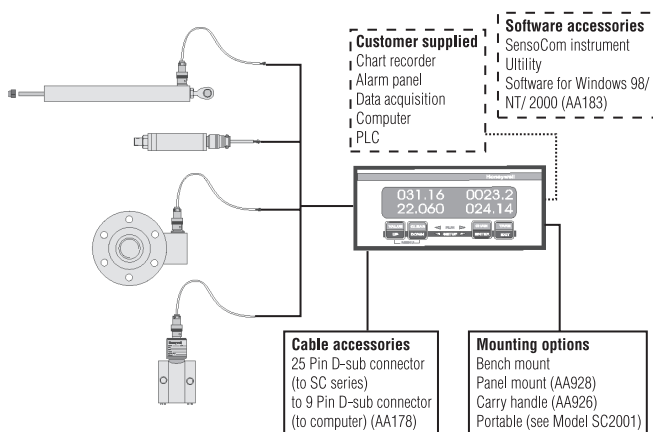


## FLEXIBLE AND EXPANDABLE PLATFORM OPTIONS

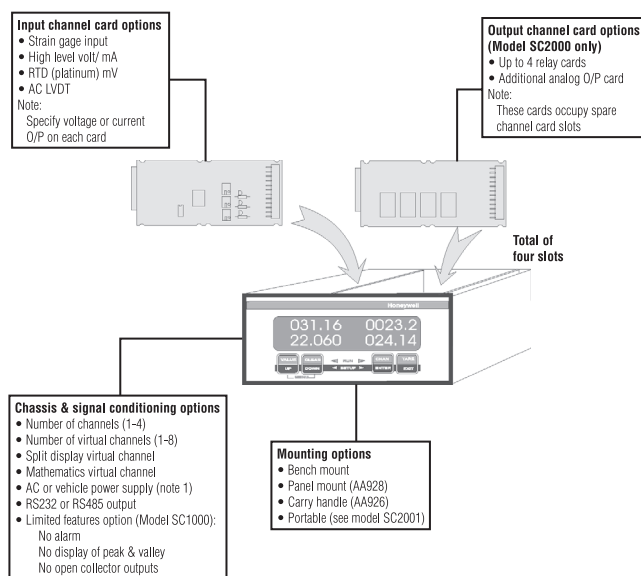

# Model SC1000/SC2000

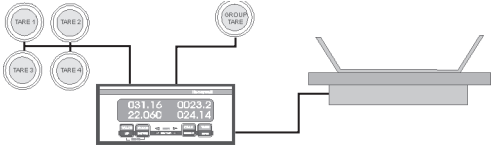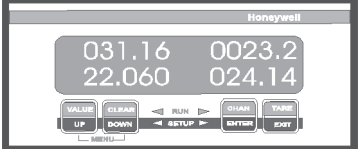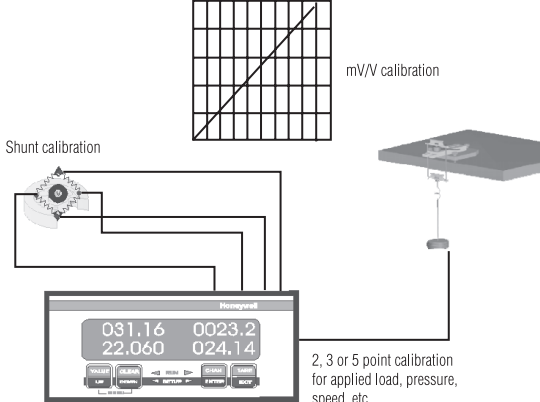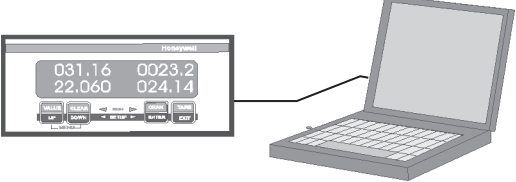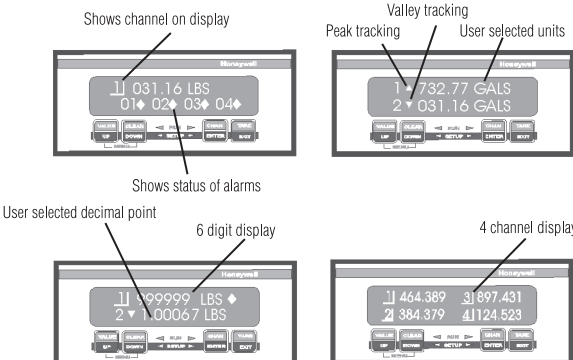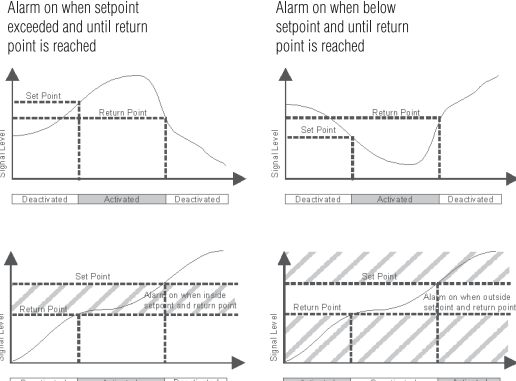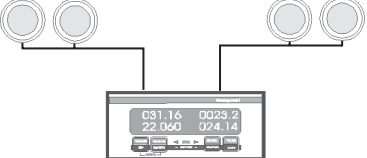
## SC2000 CAPABILITIES

<p><b>Front panel or remote tare</b></p> 	<p><b>Flexible user setup</b></p> <p>Number of channels for display      Calibration data</p> <p>Serial communications      Number of decimal places</p>  <p>Output voltage      Engineering units</p> <p>Alarm outputs      Display averaging</p> <p>Update signature module</p>																																																
<p><b>mV/V or shunt calibration or five-point calibration</b></p> 	<p><b>Remote setup</b></p> 																																																
<p><b>User selectable display options</b></p> 	<p><b>Different alarm configurations</b></p> 																																																
<p><b>User selectable filtering</b></p>  <table border="1" data-bbox="224 1810 636 1957"> <thead> <tr> <th>Frequency Response (Hz) (field selectable)</th> <th>Stop Response (ms typical)</th> <th>Not including common 1/8 octave/octave capability</th> <th>Bandwidth (octave)</th> </tr> <tr> <th>Stair</th> <th>Gauss/RC</th> <th>High Level</th> <th>AC-AC LVDT</th> </tr> </thead> <tbody> <tr> <td>2 (fast rise)</td> <td>40</td> <td>-85000</td> <td>-80000 -28000</td> </tr> <tr> <td>2</td> <td>440</td> <td>-50000</td> <td>-50000 -25000</td> </tr> <tr> <td>8</td> <td>110</td> <td>-25000</td> <td>-25000 -15000</td> </tr> <tr> <td>14</td> <td>55</td> <td>-20000</td> <td>-20000 -10000</td> </tr> <tr> <td>32</td> <td>28</td> <td>-10000</td> <td>-10000 -5000</td> </tr> <tr> <td>50</td> <td>16</td> <td>-5000</td> <td>-5000 -2000</td> </tr> <tr> <td>100</td> <td>8</td> <td>-5000</td> <td>-10000 -5000</td> </tr> <tr> <td>250</td> <td>3</td> <td>-2000</td> <td>-10000 -2000</td> </tr> <tr> <td>500</td> <td>2</td> <td>-1000</td> <td>-4000 -2000</td> </tr> <tr> <td>800</td> <td>2</td> <td>-2000</td> <td>-2500 -2000</td> </tr> </tbody> </table>	Frequency Response (Hz) (field selectable)	Stop Response (ms typical)	Not including common 1/8 octave/octave capability	Bandwidth (octave)	Stair	Gauss/RC	High Level	AC-AC LVDT	2 (fast rise)	40	-85000	-80000 -28000	2	440	-50000	-50000 -25000	8	110	-25000	-25000 -15000	14	55	-20000	-20000 -10000	32	28	-10000	-10000 -5000	50	16	-5000	-5000 -2000	100	8	-5000	-10000 -5000	250	3	-2000	-10000 -2000	500	2	-1000	-4000 -2000	800	2	-2000	-2500 -2000	<p><b>Group and individual channel remote inputs</b></p> <p>System remote Switch inputs: Peak/ valley clear Tare on Tare off</p> <p>Channel specific remote commands: Each channel can have any two: Track hold Peak/ valley hold Peak/ valley clear Tare on Tare off</p> 
Frequency Response (Hz) (field selectable)	Stop Response (ms typical)	Not including common 1/8 octave/octave capability	Bandwidth (octave)																																														
Stair	Gauss/RC	High Level	AC-AC LVDT																																														
2 (fast rise)	40	-85000	-80000 -28000																																														
2	440	-50000	-50000 -25000																																														
8	110	-25000	-25000 -15000																																														
14	55	-20000	-20000 -10000																																														
32	28	-10000	-10000 -5000																																														
50	16	-5000	-5000 -2000																																														
100	8	-5000	-10000 -5000																																														
250	3	-2000	-10000 -2000																																														
500	2	-1000	-4000 -2000																																														
800	2	-2000	-2500 -2000																																														


# Transducer Display and Signal Conditioning Unit
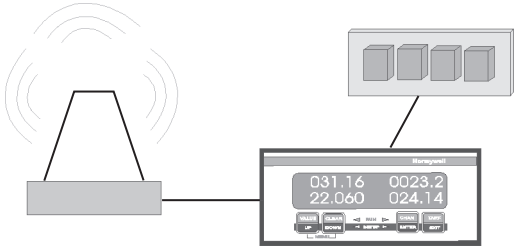
## SC2000 CAPABILITIES

Open collector alarms or via optional four-relay cards




Optional math channel can act like PLC

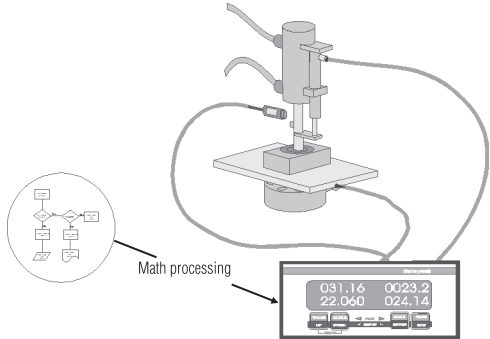


Sig cal auto setup

Auto set up  
Retrieves calibration data  
Sets up the correct engineering units  
Sets the specific range  
Sets up the correct calibration  
Scales analog output



Analog and digital outputs

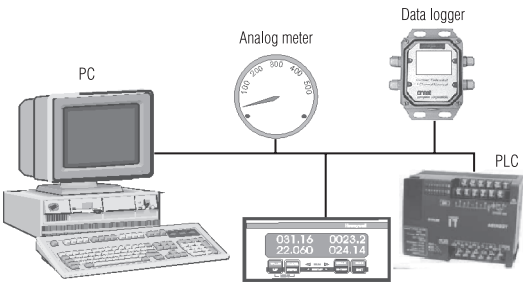

**Warranty.** Honeywell warrants goods of its manufacture as being free of defective materials and faulty workmanship. Honeywell's standard product warranty applies unless agreed to otherwise by Honeywell in writing; please refer to your order acknowledgement or consult your local sales office for specific warranty details. If warranted goods are returned to Honeywell during the period of coverage, Honeywell will repair or replace, at its option, without charge those items it finds defective. **The foregoing is buyer's sole remedy and is in lieu of all warranties, expressed or implied, including those of merchantability and fitness for a particular purpose. In no event shall Honeywell be liable for consequential, special, or indirect damages.**

While we provide application assistance personally, through our literature and the Honeywell web site, it is up to the customer to determine the suitability of the product in the application.

Specifications may change without notice. The information we supply is believed to be accurate and reliable as of this printing. However, we assume no responsibility for its use.

For more information about Sensing and Control products, visit [www.honeywell.com/sensing](http://www.honeywell.com/sensing) or call +1-815-235-6847  
Email inquiries to [info.sc@honeywell.com](mailto:info.sc@honeywell.com)

**⚠ WARNING**  
**PERSONAL INJURY**

- DO NOT USE these products as safety or emergency stop devices or in any other application where failure of the product could result in personal injury.

**Failure to comply with these instructions could result in death or serious injury.**

**⚠ WARNING**  
**MISUSE OF DOCUMENTATION**

- The information presented in this catalogue is for reference only. DO NOT USE this document as product installation information.
- Complete installation, operation and maintenance information is provided in the instructions supplied with each product.

**Failure to comply with these instructions could result in death or serious injury.**