


MICRO SWITCH™ GSS Hinge Safety Switch Product Nomenclature



For example, a **GSDA03S3** part number would define a GS Series safety switch with a red thermoplastic body and zinc die-cast head, 1/2 NPT x 14 conduit, slow-acting break-before-make contacts, and the lever to the right.

| GS | D | A | 03 | S | 3 |
|--------------------------------|--|--------------------------------------|--|--|-------------------------|
| Switch Type | Body Code | Conduit Thread | Switch Code | | Actuator Code |
| GSS Series Safety Limit Switch | C Zinc die-cast body & head | A 1/2 NPT x 14 conduit thread | 01 Snap-action contacts | 40 4NC, BBM slow acting | 1 Lever to left |
| | D Red thermoplastic body & zinc die-cast head | B PG 13.5 conduit thread | 07 Snap-action gold contacts | 41 4NC, BBM gold, slow acting | 2 Lever to top |
| | E Zinc die-cast body & head, 3 conduit | C M20 x 1.5 conduit thread | 03 Slow acting contacts, BBM | 42 2NC/1NO, BBM slow acting | 3 Lever to right |
| | | | 33 Slow acting gold contacts, BBM | 43 2NC/1NO, BBM gold, slow acting | 4 No lever |
| | | | 06 2NC slow acting contacts | 44 2NC/2NO, BBM slow acting | |
| | | | 36 2NC slow acting gold contacts | 45 2NC/2NO, BBM gold, slow acting | |
| | | | | 46 3NC/1NO, BBM slow acting | |
| | | | 47 3NC/1NO, BBM gold, slow acting | | |

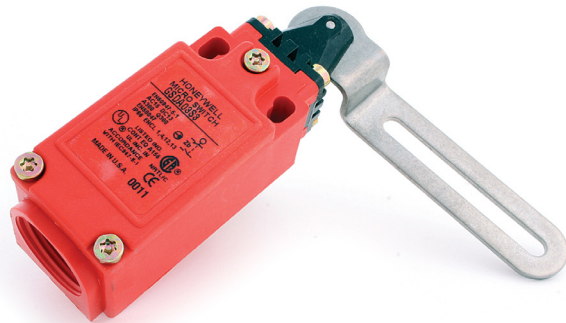

NOTE: not all combinations of model code are available.
Please contact your Honeywell provider/representative for assistance.